



## Axle Counting

# Frauscher Advanced Counter FAdC<sup>®</sup>i

The FAdCi is a particularly economical variant of the FAdC axle counter for special requirements such as shunting yards, industrial railway and public transport. The FAdCi offers all the advantages of the FAdC.



### Information

- Clear/occupied status (SIL 3)
- Direction (SIL 3)
- Number of axles
- Speed
- Wheel diameter
- Diagnostic data



### Applications

- Track vacancy detection
- Level crossing protection
- Switching point protection




### Benefits

- Simple and flexible configuration
- Software interface
- Flexible architecture
- Low maintenance
- Simple project management

# FAdC<sup>®</sup>i

Connection to a high-performance electronic interlocking is possible either via a vital customer-specific interface or the Frauscher Safe Ethernet FSE protocol.

All processes – from planning, engineering and configuration, to diagnostics, maintenance and adaptation – are supported by innovative software tools. By means of logic application, methods such as Supervisor Track Section or Counting Head Control further increase system availability.

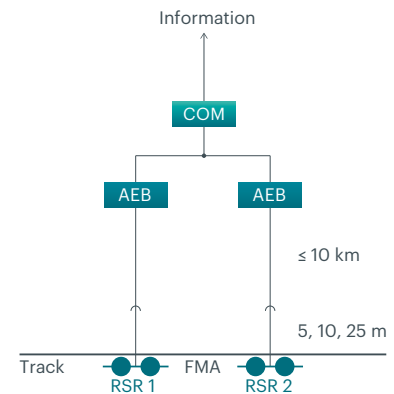

- COM** Communication board
- AEB** Evaluation board
- FMA** Track section
- RSR** Wheel sensor

## Technical Data

<b>FAdC<sup>®</sup>i</b>	
<b>Interfaces</b>	Vital, customer-specific protocol Frauscher Safe Ethernet FSE protocol and/or vital output via optocoupler or relay interface
<b>Safety level</b>	SIL 3 (communication according to EN 50159, category 2)
<b>Temperature</b>	Outdoor equipment: -40 °C to +85 °C ("outside" climatic class TX of EN 50125-3) Indoor equipment: -40 °C to +70 °C ("in cabinet" climatic class T2 of EN 50125-3)
<b>Humidity</b>	Outdoor equipment: 100%, IP68 Indoor equipment: up to 100% (without condensation or ice formation for the entire temperature range)
<b>Electromagnetic compatibility</b>	EN 50121-4
<b>Mechanical stress</b>	3M2 according to EN 60721-3-3 suitable for use in compact outdoor cabinets close to the track
<b>Speed</b>	0 km/h (static) to 80 km/h
<b>Dimensions</b>	Format: 19" housing for 100 mm x 160 mm boards Width: board rack with 42 or 84 width units Height: 3 height units
<b>Power supply</b>	Voltage: +19 V DC bis +72 V DC Power: approx. 4.5 W per counting head Isolation voltage: 3 100 V